


WB-100 | Boundary Microphone

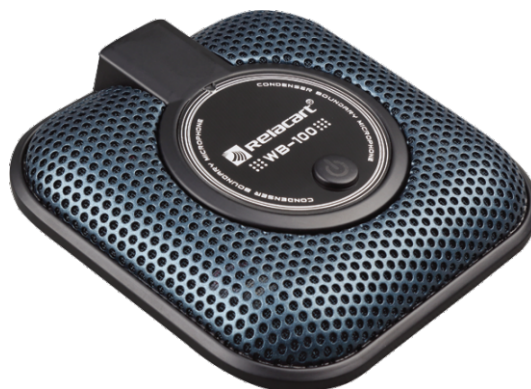

Description

WB-100 is a wide frequency response condenser cardioid omnidirectional optional boundary microphone, designed for flat placement applications, providing high-quality sound pickup, conference, professional recording, TV broadcasting and other high-demand pickup applications.

Product Specification

Power Requirement:	24-52V DC Phantom
Consumption:	8mA(Typical)
Element:	Omnidirectional(360°) condenser
Polar Pattern:	Cardioid (120°abovemounting surface)
Frequency Response:	65Hz-18KHz
Low Frequency Roll-Off:	80Hz.18dB/octave
Sensitivity:	-36dB 1Pa at 1V
S/N Ratio:	>67dB
Output Impedance:	200Ω
Dimension(mm):	110(W)×110(D)×18(H)
Weight:	300g